

帶鋸機自送料 (風壓)


BAND SAW FEEDER
(pneumatic)



●YL-28TBR ●YL-42TBR
●YL-36TBR ●YL-44TBR

型號規格		YL-28TBR	YL-36TBR	YL-42TBR	YL-44TBR
鋸輪直徑和寬度(Wheel Diameter and face)	m/m	710×90	910×90	1070×114	1117×116
使用鋸片規格 (Saw blade size)	寬(Width)	mm	100	100	127
	長(Length)	mm	5220-5290	6310-6350	7700-7800
	厚(Thickness)	mm	20#-22#	20 #-22#	18#-20#
最大鋸切高度(Max. cutting diameter)	m/m	200	300	400	400
送料輪至鋸片距離(Distance from feed roller to blade)	m/m	100	150	200	250
送料輪速度-可變速(Feed speed-Variable)	m/min	0-20	0-20	0-20	0-20
鋸片至機腹距離(Distance between saw & frame)	m/m	355	430	505	525
鋸片至靠板最大距離(Max. distance between saw & gauge)	m/m	200	250	320	320
鋸輪容許轉速(Wheel allowable speed rpm)	rpm	600-700	600-700	600-700	600-700
馬達動力(Motor power)	HP	15	25	30	40
淨重(Net weight)	kg	900	1200	1700	1900
毛重(Gross weight)	kg	1200	1500	2200	2400

www.routmac.com

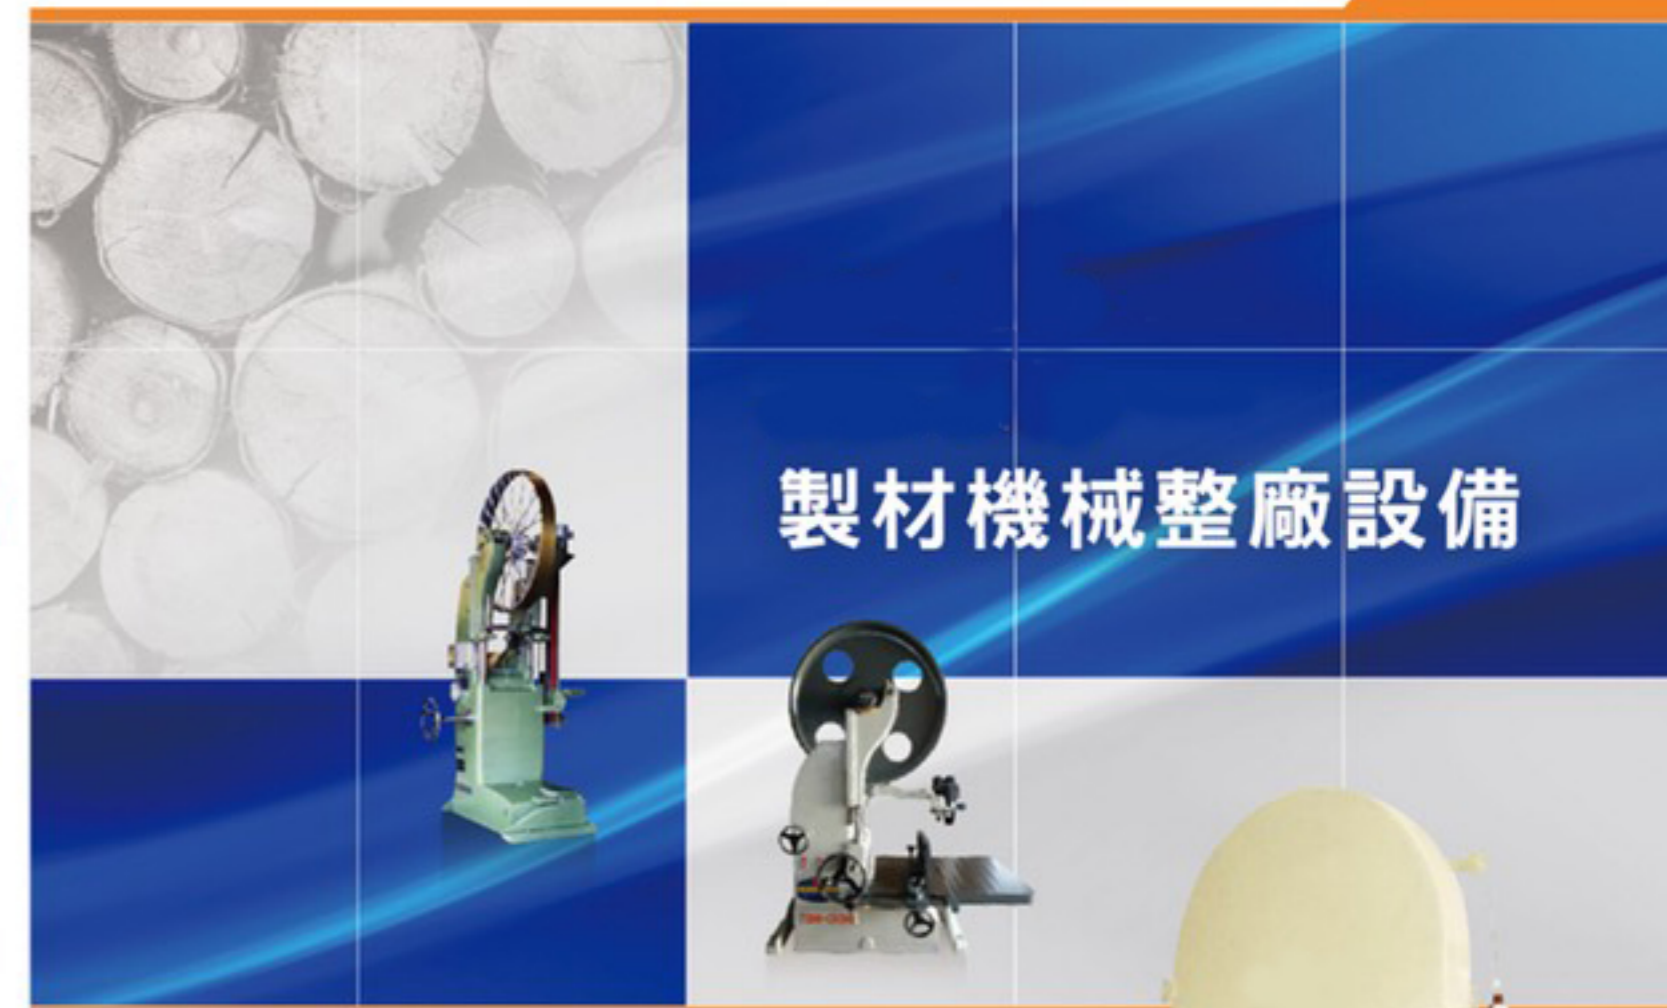

帶鋸機 BAND SAW




●YL-36TB ●YL-42TB ●YL-44TB

型號規格		YL-36TB	YL-42TB	YL-44TB
鋸輪直徑和寬度(Wheel Diameter and face)	m/m	910×90	1070×114	1117×116
使用鋸片規格 (Saw blade size)	寬(Width)	mm	100	127
	長(Length)	mm	6310-6350	7700-7800
	厚(Thickness)	mm	20#-22#	18#-20#
中心鋸割最大直徑(Max. cutting dia.)	m/m	720	880	930
鋸片至機座距離(Distance between saw & frame)	m/m	430	505	525
鋸片至尺規板最大距離(Max. distance between saw & gauge)	m/m	290	360	360
鋸輪容許回轉速(Speed of Wheel)	rpm	600-700	600-700	600-700
馬達動力(Motor power)	HP	20-30	30-40	30-40
淨重(Net weight)	kg	1200	2000	2200
毛重(Gross weight)	kg	1300	2200	2400

圓木鏈鋸機

CHAIN SAW LOGS (4 FEET 5FEET)

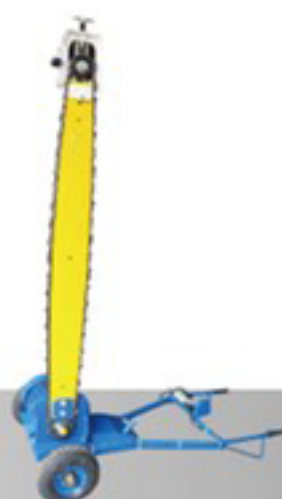

●YL-05 ●YL-06

型號規格	YL-05	YL-06
圓木鏈鋸機	5FEET	6FEET
鋸板	4FEET	5FEET
馬達動力(Motor Power)	HP	7.5

鋸帶熔接機

CONTOUR BELT
WELDING MACHINE



●YL-48CC ●YL-48CC(小型)

型號規格	YL-48CC	YL-48CC(小型)
電壓(Voltage)	220V	110V/ 220V
容量(Capacity)	3.5KVA	2.0KVA
熔接範圍(Fusion scope)	m/m	Tooth width3-25
機械尺寸(Mechanical size)	m/m	395×205×245
砂輪馬達(Grinding wheelmotor)	HP	1/8
外殼鐵箱(Outer covering iron tank)	有外殼(Has the outer covering)	有外殼(Has the outer covering)
重量(Weight)	kg	30



彎鋸機

BAND SCROLL SAW



•YL-26SB
•YL-28SB

型號規格		YL-26SB	YL-28SB
鋸輪直徑和寬度(Wheel Diameter and face)	m/m	660-50	710-75
使用鋸片規格 (Saw blade size)	寬(Width)	mm	12-50
	長(Length)	mm	4550
	厚(Thickness)	mm	21#-24#
最大鋸切直徑(Max. diameter of log in center cut)	m/m	360	360
鋸片至機腹距離(Distance between saw and frame)	m/m	600	620
鋸片至靠板最大距離(Max. distance from saw to fence)	m/m	350	350
鋸輪容許轉速(Permissible wheel speed)	rpm	600-700	600-700
皮帶輪規格(Standard size of belt pulley)		10-A2T	10-A2T
馬達動力(Motor power)	HP	3	5
淨重(Net weight)	kg	400	450
毛重(Gross weight)	kg	500	500

帶鋸機附送料機

BAND SCROLL SAW FEEDER



•YL-26SBR
•YL-28SBR

型號規格		YL-26SBR	YL-28SBR
鋸輪直徑和寬度(Wheel Diameter and face)	m/m	660-50	710-75
使用鋸片規格 (Saw blade size)	寬(Width)	mm	50
	長(Length)	mm	4550
	厚(Thickness)	mm	21#-24#
最大鋸切直徑(Max. diameter of log in center cut)	m/m	120	150
鋸片至機腹距離(Distance between saw and frame)	m/m	600	600
鋸片至靠板最大距離(Max. distance from saw to fence)	m/m	200	200
鋸輪容許轉速(Permissible wheel speed)	rpm	600-700	600-700
皮帶輪規格(Standard size of belt pulley)		10-A2T	10-A2T
馬達動力(Motor power)	HP	5	5
淨重(Net weight)	kg	500	550
毛重(Gross weight)	kg	550	600

帶鋸機

BAND SAW



•YL-28TB

型號規格		YL-28TB
鋸輪直徑和寬度(Wheel Diameter and face)	m/m	710×90
使用鋸片規格 (Saw blade size)	寬(Width)	mm
	長(Length)	mm
	厚(Thickness)	mm
最大鋸切直徑(Max. diameter of log in center cut)	m/m	620
鋸片至機腹距離(Distance between saw and frame)	m/m	355
鋸片至靠板最大距離(Max. distance from saw to fence)	m/m	250
鋸輪容許轉速(Permissible wheel speed)	rpm	600-700
馬達動力(Motor power)	HP	7 1/2-15
淨重(Net weight)	kg	900
毛重(Gross weight)	kg	1000

自動送料機

LGHT DUTY AUTO-FEED CARRIAGE



•YL-44LD
•YL-48LD

型號規格		YL-44LD	YL-48LD
最大能開度(Max. Opening of headblock)	m/m	1120	1220
標準三座枋材架長度(Length of standard 4-headblock carriage)	m/m	4600	4835
軌道長度,每邊(Length of rails for the above,each)	m/m	16320	16320
鋼軌中心距離(Distance between rails)	m/m	1303	1420
車輪直徑(Diameter of truck wheels)	m/m	250	250
最大送料速度(Standard cattiage speed. up to R.P.M)		45	45
最大後退速度(Standard return speed. up to R.P.M.)		90	90
馬達動力(Motro power)	HP	5-10	5-10
淨重(Net weight)	kg	3000	3200
毛重(Gross weight)	kg	3250	3500

圓木帶鋸機

LOG BAND MILL (BIG LOG)



•YL-42LB
•YL-44LB
•YL-48LB

型號規格		YL-42LB	YL-44LB	YL-48LB
鋸輪直徑和寬度(Wheel Diameter and face)	m/m	1070x114	1110x140	1200x150
使用鋸片規格 (Saw blade size)	寬(Width)	mm	127	150
	長(Length)	mm	7700-7800	8300-8600
	厚(Thickness)	mm	18#-20#	19#-20#
最大鋸切尺寸(高×寬)(Max. cutting size -H×W)	m/m	900x500	1200x525	1560x600
鋸片至機腹距離(Distance between saw & frame)	m/m	500	525	600
鋸輪轉速(Speed of wheel)	rpm	500-700	500-700	500-700
皮帶輪規格(Standard size of belt pulley)	m/m	355	355	455
馬達動力(Motro power)	HP	30-40	40-50	50-75
淨重(Net weight)	kg	1700	2000	3000
毛重(Gross weight)	kg	2200	2600	3600

自動磨鋸機

AUTO BAND SAW SHARPENER



•YL-48AA

型號規格		YL-48AA
鋸片寬度範圍(Range of saw blade width)	m/m	50-203(2"-8")
鋸條間距範圍(Range of saw blade pitch)	m/m	19-38(3/4"-1 1/2")
砂輪速度(Grinding wheel speed)		2100/2300RPM(50HZ)
		2450/2705RPM(60HZ)
砂輪尺寸(Grinding wheel size)	m/m	203×19×13
刀片送料輪速度(Blade feed speed)		42m/min(50HZ)
馬達動力(Motor Power)		1HP-4P
外型尺寸(Dimensions)	m/m	640×1080×800
淨重(Net weight)	kg	270(1case)
毛重(Gross weight)	kg	350(1case)

磨鋸機

AUTO BAND SAW SHARPENER



•YL-48A

型號規格		YL-48A
最大磨鋸寬度(Max. blade width)		6"
砂輪尺寸(Grinding wheel size)		8"-10"
馬達(Motor Power)	HP	1
淨重(Net weight)	kg	170
毛重(Gross weight)	kg	240

伸鋸機

BAND SAWBLADE STRETCHER



•YL-48B

型號規格		YL-48B
最大伸鋸寬度(Max. blade width)		6"or 8"
馬達動力(Motor Power)	HP	1
淨重(Net weight)	kg	80
毛重(Gross weight)	kg	130

接鋸機

(焊接鋸片)

BAND SAWBLADE BRAZING CLAMP



•YL-48C

型號規格		YL-48C
接鋸寬度(Welding width of blade)		1/2"-6"
淨重(Net weight)	kg	60
毛重(Gross weight)	kg	130

帶鋸打鋸機

Product info



•YL-48D

型號規格		YL-48D
最大伸鋸寬度(Max.sawblade width)		1/2"-4"
淨重(Net weight)	kg	50
毛重(Gross weight)	kg	70
機械尺寸(Machine dimensions)-(L×W×H)		18"×20"×48"